

NEAR EDGE

# RESIN NE

Resin for TTO



RESIN NE is a resin particularly suggested for near edge TTO printers.

This product has been designed to print on plastic packagings at high speed. It is recommended for applications that need to resist sterilisation processes or for shiny and glossy aluminium substrates.

## TECHNICAL FEATURES

|                    |                                                     |
|--------------------|-----------------------------------------------------|
| COLOR              | Black                                               |
| BACK COATING       | Silicone base                                       |
| IMAGE DARKNESS     | 2.40 ODR                                            |
| INK MELTING POINT  | 80°±3°C                                             |
| STORAGE CONDITIONS | 12 Months / 5-35°C<br>20-80% Relative Humidity Rate |
| PRINTING SPEED     | 40 IPS                                              |
| FILM THICKNESS     | 4.5 microns                                         |
| TOTAL THICKNESS    | 6.0 microns                                         |



STANDARD



PREMIUM



EXCELLENT

**RESIN NE**

RESIN NE39

## PRINTING FEATURES

### DARKNESS



### SCRATCH RESISTANCE



### SHARPNESS



### PRINT TEMPERATURE



### PRINT SPEED



### BARCODE 90°




# RESIN NE

Resin for TTO

## RECOMMENDED APPLICATIONS



LOGISTICS



PACKAGING




CHEMICAL




FOOD &amp; BEVERAGE




HORTICULTURE



AUTOMOTIVE



MEDICAL



ELECTRONICAL




HEALTH AND BEAUTY



TEXTILE

## RECOMMENDED SUBSTRATES

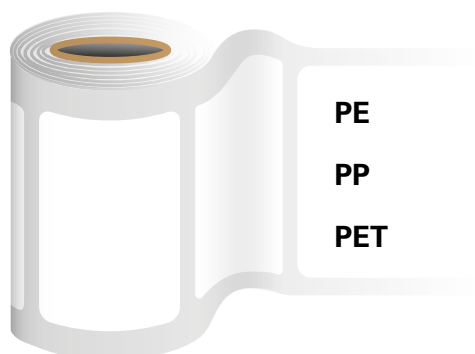

## CHEMICALS RESISTANCE



ALCOHOL



GASOLINE



GASOLINE + OIL



## COMPLIANCES



ISEGA



T H E R M A L  
T R A N S F E R  
R I B B O N

**E.U.R.O. Srl**  
Via Pacinotti, 28  
30033 Noale (VE)

Tel. +39 041 3195211  
ttr@eurossrl.com  
**www.eurossrl.com**